

Energy Saving Lamps

Luxtek®





Energy Saving Lamps Full Half Spiral series


Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features


- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly

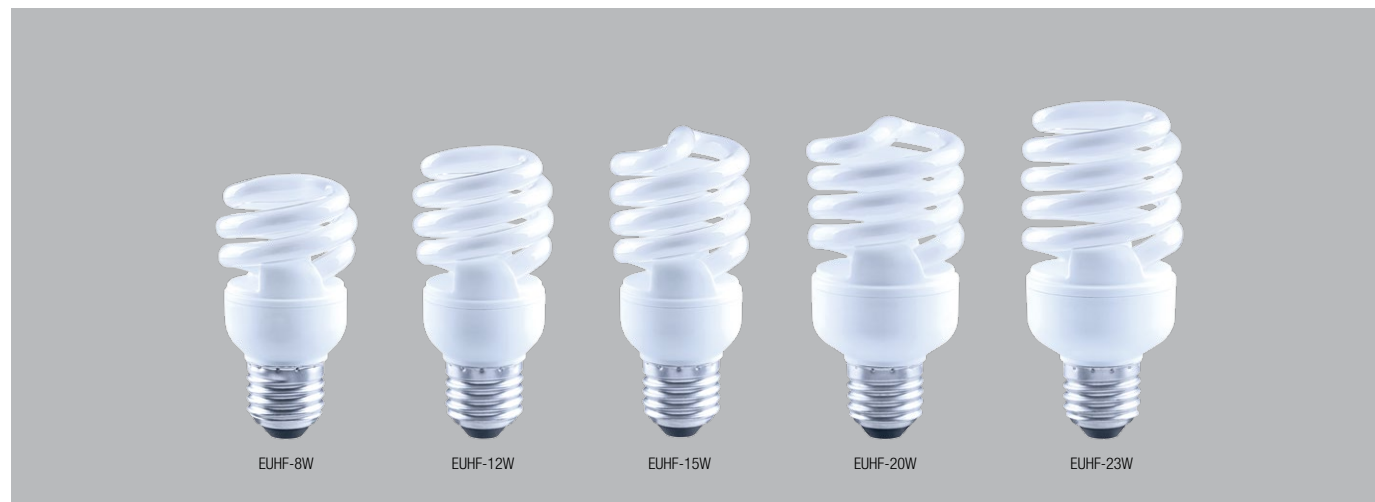

Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUHF-8W	A	T2	450 lm	8W	41W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUHF-12W	A	T2	750 lm	12W	61W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUHF-15W	A	T2	950 lm	15W	73W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUHF-20W	A	T2	1250 lm	20W	91W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUHF-23W	A	T2	1500 lm	23W	105W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27



EUHF-8W	
E14	Ø48 x 84H mm
E27	Ø48 x 83H mm
EUHF-12W	
E14	Ø48 x 101H mm
E27	Ø48 x 94H mm



EUHF-15W	
E27	Ø48 x 104H mm
EUHF-20W	
E27	Ø54 x 111H mm
EUHF-23W	
E27	Ø54 x 116H mm



Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm

Luxtek®





Energy Saving Lamps Full Half Spiral series


Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features


- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly

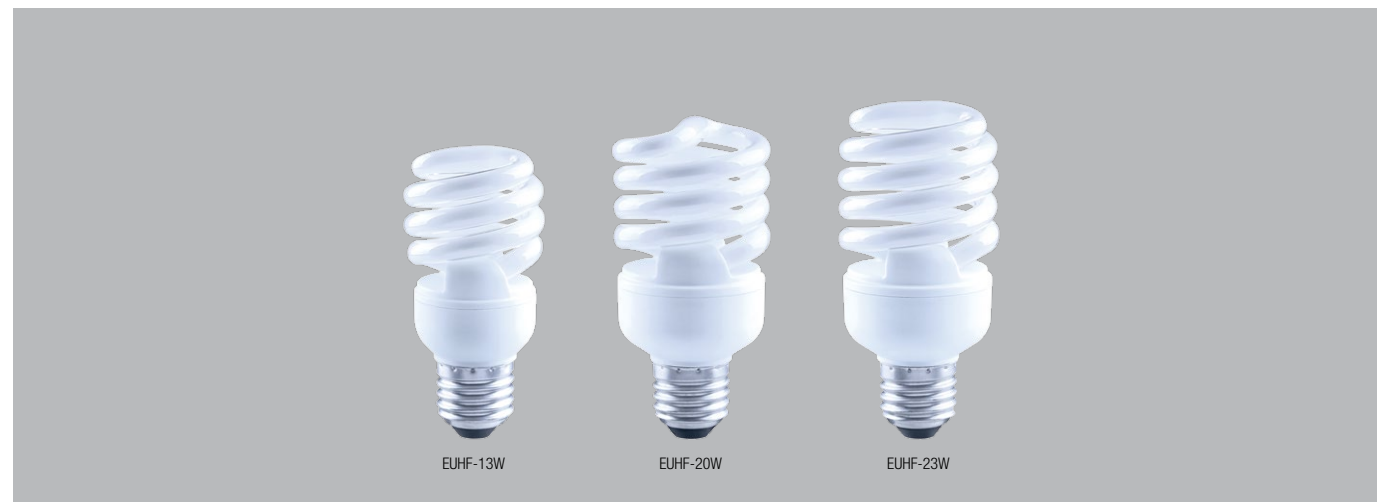

Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUHF-13W	A	T2	800 lm	13W	64W	2700 / 3000 / 4100 K	10000 hrs	≥80	120V	No	E26
EUHF-20W	A	T2	1200 lm	20W	88W	2700 / 3000 / 4100 K	10000 hrs	≥80	120V	No	E26
EUHF-23W	A	T2	1445 lm	23W	103W	2700 / 3000 / 4100 K	10000 hrs	≥80	120V	No	E26



Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



EUHF-13W	
E26	Ø48 x 99H mm
EUHF-20W	
E26	Ø54 x 108H mm
EUHF-23W	
E26	Ø54 x 115H mm

Luxtek®





T2



Energy Saving Lamps Full Spiral | T2 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.


Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly


Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUF-5W T2	A	T2	270 lm	5W	28W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14
EUF-8W T2	A	T2	440 lm	8W	40W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-9W T2	A	T2	480 lm	9W	43W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14
EUF-11W T2	A	T2	600 lm	11W	50W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-11W T2	A	T2	700 lm	11W	57W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-14W T2	A	T2	850 lm	14W	67W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUF-15W T2	A	T2	850 lm	15W	67W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUF-18W T2	A	T2	1200 lm	18W	88W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUF-20W T2	A	T2	1300 lm	20W	94W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUF-23W T2	A	T2	1450 lm	23W	103W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27



EUF-5W T2	
E14	Ø30.5 x 84H mm
EUF-8W T2	
E14	Ø36 x 94H mm
E27	Ø36 x 92H mm
EUF-9W T2	
E14	Ø30.5 x 105H mm

EUF-11W T2	
E14	Ø36 x 103H mm
E27	Ø36 x 100H mm
EUF-11W T2	
E14	Ø42 x 102H mm
E27	Ø42 x 100H mm

EUF-14W T2	
E27	Ø42 x 104H mm
EUF-15W T2	
E27	Ø42 x 104H mm



EUF-18W	
E27	Ø55 x 104H mm
EUF-20W	
E27	Ø55 x 111H mm
EUF-23W	
E27	Ø55 x 111H mm



Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



Energy Saving Lamps Full Spiral | T3 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs


Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly

T3



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUF-5W T3	A	T3	270 lm	5W	28W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-7W T3	A	T3	380 lm	7W	36W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-9W T3	A	T3	460 lm	9W	41W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-11W T3	A	T3	600 lm	11W	50W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUF-15W T3	A	T3	900 lm	15W	70W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUF-20W T3	A	T3	1200 lm	20W	88W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

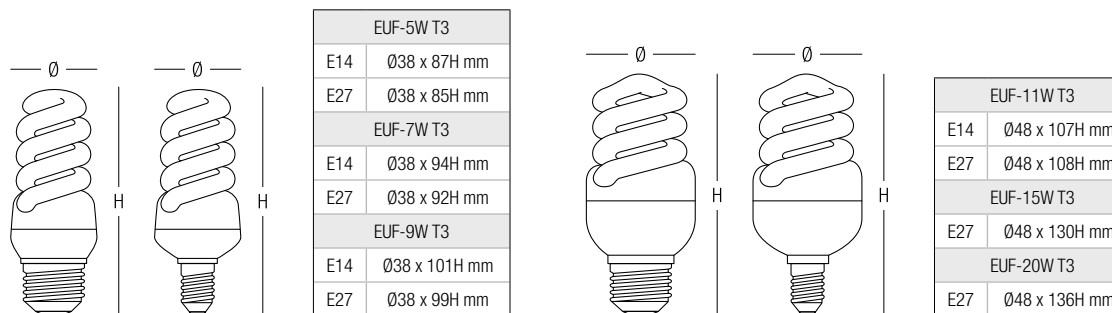

Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



Energy Saving Lamps Full Spiral | T4 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly

T4




EUF-23W T4




EUF-30W T4

Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUF-23W T4	A	T4	1540 lm	23W	108W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUF-30W T4	A	T4	1897 lm	30W	129W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

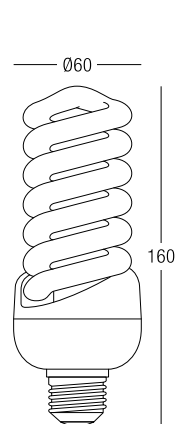

EUF-23W T4

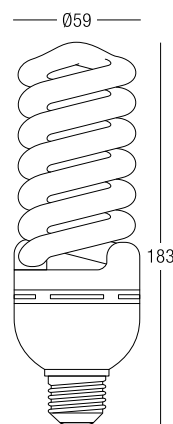

EUF-30W T4



Tolerance of product dimension Length $\pm 2\text{mm}$ / Diameter $\pm 0.5\text{mm}$

Luxtek®





T2



Energy Saving Lamps Half Spiral | T2 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.


Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly


Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUH-8W T2	A	T2	470 lm	8W	42W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUH-9W T2	A	T2	550 lm	9W	47W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUH-10W T2	A	T2	620 lm	10W	52W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUH-11W T2	A	T2	660 lm	11W	54W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-12W T2	A	T2	720 lm	12W	58W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-15W T2	A	T2	800 lm	15W	65W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-18W T2	A	T2	1200 lm	18W	88W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-20W T2	A	T2	1250 lm	20W	91W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-23W T2	A	T2	1480 lm	23W	104W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-24W T2	A	T2	1480 lm	24W	104W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27



EUH-8W T2	
E14	Ø45 x 92H mm
E27	Ø45 x 87H mm
EUH-9W T2	
E14	Ø45 x 98H mm
E27	Ø45 x 93H mm

EUH-10W T2	
E14	Ø45 x 98H mm
E27	Ø45 x 93H mm
EUH-11W T2	
E27	Ø46 x 93H mm

EUH-12W T2	
E27	Ø45 x 95H mm
EUH-15W T2	
E27	Ø45 x 115H mm



EUH-18W T2	
E27	Ø56 x 107H mm
EUH-20W T2	
E27	Ø56 x 112H mm
EUH-23W T2	
E27	Ø56 x 112H mm
EUH-24W T2	
E27	Ø56 x 112H mm

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



Energy Saving Lamps Half Spiral | T3 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs


Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly

T3



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUH-9W T3	A	T3	560 lm	9W	48W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUH-11W T3	A	T3	670 lm	11W	55W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUH-13W T3	A	T3	835 lm	13W	66W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-15W T3	A	T3	940 lm	15W	73W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-18W T3	A	T3	1150 lm	18W	85W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUH-23W T3	A	T3	1520 lm	23W	107W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

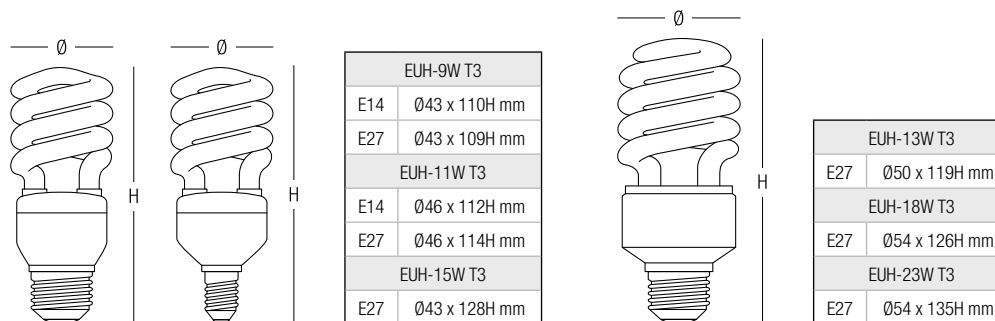

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



Energy Saving Lamps Half Spiral | T4 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features


- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly

T4



EUH-23W T4

Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUH-23W T4	A	T4	1600 lm	23W	111W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

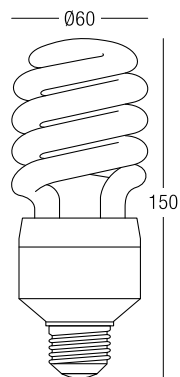

EUH-23W T4



Tolerance of product dimension Length $\pm 2\text{mm}$ / Diameter $\pm 0.5\text{mm}$





Energy Saving Lamps 2U series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages





- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUS-5W T2	A	T2	220 lm	5W	24W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUS-7W T2	A	T2	310 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUS-9W T2	A	T2	430 lm	9W	39W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUS-7W T3	A	T3	365 lm	7W	35W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUS-9W T3	A	T3	480 lm	9W	43W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUS-11W T3	A	T3	580 lm	11W	49W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27

		<table><tr><th colspan="2">EUS-5W T2</th></tr><tr><td>E14</td><td>Ø30 x 98H mm</td></tr><tr><td>E27</td><td>Ø30 x 98H mm</td></tr></table>	EUS-5W T2		E14	Ø30 x 98H mm	E27	Ø30 x 98H mm			<table><tr><th colspan="2">EUS-7W T3</th></tr><tr><td>E14</td><td>Ø40 x 122H mm</td></tr><tr><td>E27</td><td>Ø40 x 120H mm</td></tr></table>	EUS-7W T3		E14	Ø40 x 122H mm	E27	Ø40 x 120H mm
EUS-5W T2																	
E14	Ø30 x 98H mm																
E27	Ø30 x 98H mm																
EUS-7W T3																	
E14	Ø40 x 122H mm																
E27	Ø40 x 120H mm																
		<table><tr><th colspan="2">EUS-7W T2</th></tr><tr><td>E14</td><td>Ø30 x 104H mm</td></tr><tr><td>E27</td><td>Ø30 x 104H mm</td></tr></table>	EUS-7W T2		E14	Ø30 x 104H mm	E27	Ø30 x 104H mm			<table><tr><th colspan="2">EUS-9W T3</th></tr><tr><td>E14</td><td>Ø40 x 132H mm</td></tr><tr><td>E27</td><td>Ø40 x 130H mm</td></tr></table>	EUS-9W T3		E14	Ø40 x 132H mm	E27	Ø40 x 130H mm
EUS-7W T2																	
E14	Ø30 x 104H mm																
E27	Ø30 x 104H mm																
EUS-9W T3																	
E14	Ø40 x 132H mm																
E27	Ø40 x 130H mm																
		<table><tr><th colspan="2">EUS-9W T2</th></tr><tr><td>E14</td><td>Ø30 x 120H mm</td></tr><tr><td>E27</td><td>Ø30 x 120H mm</td></tr></table>	EUS-9W T2		E14	Ø30 x 120H mm	E27	Ø30 x 120H mm			<table><tr><th colspan="2">EUS-11W T3</th></tr><tr><td>E14</td><td>Ø40 x 142H mm</td></tr><tr><td>E27</td><td>Ø40 x 140H mm</td></tr></table>	EUS-11W T3		E14	Ø40 x 142H mm	E27	Ø40 x 140H mm
EUS-9W T2																	
E14	Ø30 x 120H mm																
E27	Ø30 x 120H mm																
EUS-11W T3																	
E14	Ø40 x 142H mm																
E27	Ø40 x 140H mm																



Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm





Energy Saving Lamps 3U | T2 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs


Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly

T2



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUT-5W T2	A	T2	250 lm	5W	26W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUT-7W T2	A	T2	320 lm	7W	31W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUT-9W T2	A	T2	420 lm	9W	39W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUT-11W T2	A	T2	540 lm	11W	46W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27



EUT-5W T2	
E14	Ø38 x 87H mm
E27	Ø38 x 85H mm
EUS-7W T2	
E14	Ø38 x 92H mm
E27	Ø38 x 90H mm

EUT-9W T2	
E14	Ø38 x 102H mm
E27	Ø38 x 100H mm
EUS-11W T2	
E14	Ø38 x 110H mm
E27	Ø38 x 108H mm

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



Energy Saving Lamps 3U | T3 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs


Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly


T3



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUT-7W T3	A	T3	380 lm	7W	36W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUT-9W T3	A	T3	480 lm	9W	43W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUT-11W T3	A	T3	600 lm	11W	51W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EUT-14W T3	A	T3	740 lm	14W	59W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-15W T3	A	T3	840 lm	15W	66W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-17W T3	A	T3	970 lm	17W	75W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27



EUT-7W T3	
E14	Ø40 x 101H mm
E27	Ø40 x 100H mm
EUT-9W T3	
E14	Ø40 x 111H mm
E27	Ø40 x 110H mm
EUT-11W T3	
E14	Ø40 x 124H mm
E27	Ø40 x 125H mm
EUT-14W T3	
E27	Ø44 x 135H mm



EUT-15W T3	
E27	Ø46 x 148H mm
EUT-17W T3	
E27	Ø46 x 149H mm



Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



Energy Saving Lamps 3U | T3 & T4 series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly

T3




EUT-20W T3

T4



EUT-23W T4

Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUT-20W T3	A	T3	1200 lm	20W	88W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-23W T4	A	T4	1400 lm	23W	100W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

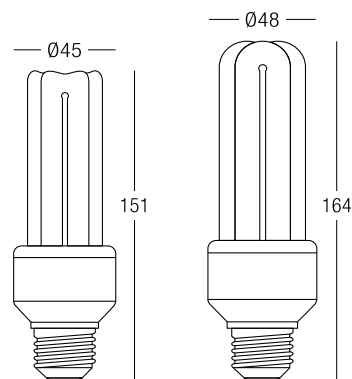

EUT-20W T3

EUT-23W T4



Tolerance of product dimension Length $\pm 2\text{mm}$ / Diameter $\pm 0.5\text{mm}$





Energy Saving Lamps 4U series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 88%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EUT-15W 4U T2	A	T2	800 lm	15W	63W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-15W 4U T3	A	T3	850 lm	15W	67W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-20W 4U T3	A	T3	1200 lm	20W	88W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-23W 4U T3	A	T3	1370 lm	23W	98W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EUT-30W 4U T4	A	T4	1900 lm	30W	129W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

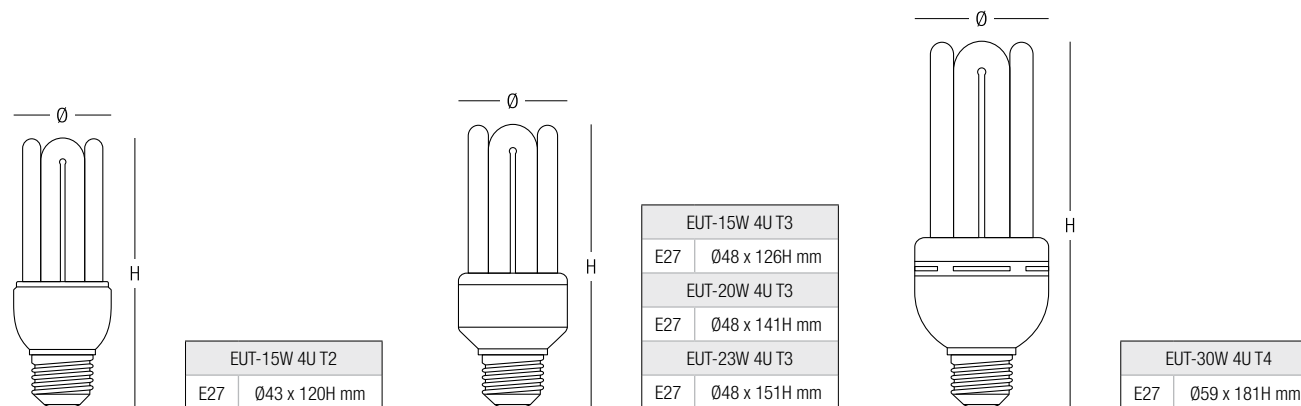

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm





Energy Saving Lamps Candle series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly




Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EBC-5W T2	A	T2	190 lm	5W	21W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EBC-6W T2	A	T2	230 lm	6W	25W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EBC-7W T2	A	T2	300 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EBC-9W T2	A	T2	430 lm	9W	39W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EBC-9W T3	A	T3	410 lm	9W	38W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EBC-11W T3	A	T3	540 lm	11W	47W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27



EBC-5W T2	
E14	Ø36 x 96H mm
E27	Ø36 x 93H mm
EBC-6W T2	
E14	Ø38 x 113H mm
E27	Ø38 x 107H mm

EBC-7W T2	
E14	Ø38 x 113H mm
E27	Ø38 x 107H mm
EBC-9W T2	
E14	Ø41 x 108H mm
E27	Ø41 x 107H mm



EBC-9W T3	
E14	Ø50 x 132H mm
E27	Ø50 x 131H mm
EBC-11W T3	
E14	Ø50 x 132H mm
E27	Ø50 x 131H mm



Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm





Energy Saving Lamps GLS shape series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EB-5W T2	A	T2	190 lm	5W	21W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EB-7W T2	A	T2	300 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27



EB-5W T2	
E14	Ø45 x 93H mm
E27	Ø45 x 89H mm
EB-7W T2	
E14	Ø45 x 102H mm
E27	Ø45 x 99H mm

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



Energy Saving Lamps GLS shape series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EB-7W T3	A	T3	300 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EB-11W T3	A	T3	540 lm	11W	47W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EB-15W T3	A	T3	800 lm	15W	63W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EB-20W T3	A	T3	1160 lm	20W	86W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

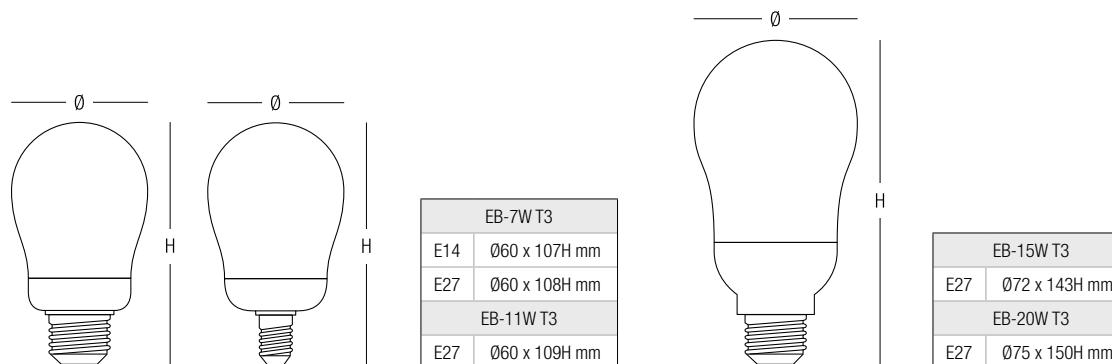

Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



Energy Saving Lamps GLS shape series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features


- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly




Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EB-9W T3	A	T3	430 lm	9W	39W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EB-14W T3	A	T3	740 lm	14W	59W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EB-17W T3	A	T3	970 lm	17W	74W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EB-23W T3	A	T3	1390 lm	23W	99W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27



Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



EB-9W T3	
E27	Ø56 x 109H mm



EB-14W T3	
E27	Ø60 x 121H mm
EB-17W T3	
E27	Ø70 x 138H mm
EB-23W T3	
E27	Ø80 x 156H mm





Energy Saving Lamps Globe series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features


- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EG-5W T2	A	T2	190 lm	5W	21W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EG-6W T2	A	T2	230 lm	6W	25W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EG-7W T2	A	T2	300 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EG-9W T2	A	T2	430 lm	9W	39W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EG-11W T2	A	T2	540 lm	11W	47W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27




Tolerance of product dimension Length $\pm 2\text{mm}$ / Diameter $\pm 0.5\text{mm}$



EG-5W T2	
E14	Ø45 x 83H mm
E27	Ø45 x 80H mm
EG-6W T2	
E14	Ø45 x 83H mm
E27	Ø45 x 80H mm

EG-7W T2	
E14	Ø45 x 83H mm
E27	Ø45 x 80H mm
EG-9W T2	
E14	Ø55 x 98H mm
E27	Ø55 x 96H mm

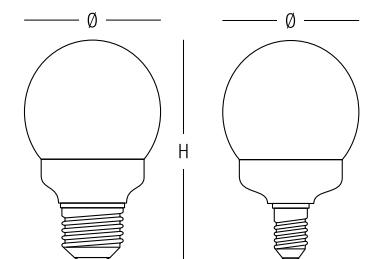

EG-11W T2	
E14	Ø60 x 98H mm
E27	Ø60 x 97H mm



Energy Saving Lamps Globe series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EG-5W T3	A	T3	190 lm	5W	21W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EG-7W T3	A	T3	300 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EG-11W T3	A	T3	540 lm	11W	47W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EG-15W T3	A	T3	800 lm	15W	63W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EG-20W T3	A	T3	1160 lm	20W	86W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EG-23W T3	A	T3	1380 lm	23W	99W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

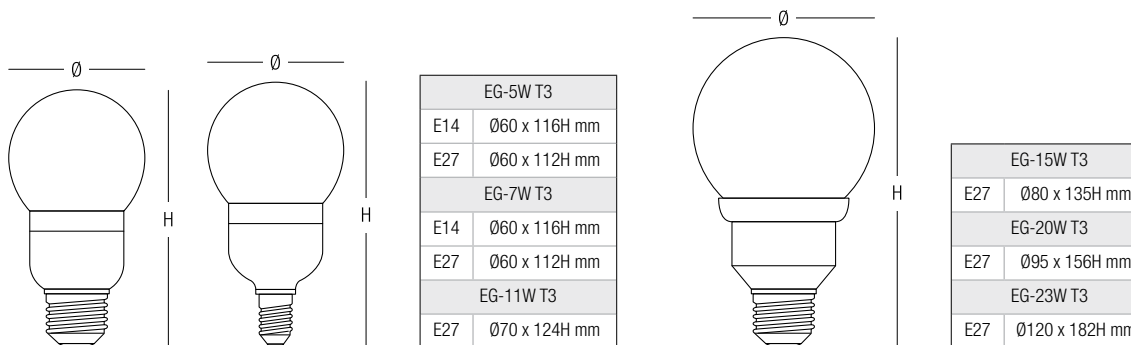

Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



Energy Saving Lamps Globe series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance over 83%
- Reliable starting at -20°C
- High energy efficiency
- Save 80% energy compare with incandescent bulbs

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EG-20W T3	A	T3	1160 lm	20W	86W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27
EG-23W T3	A	T3	1380 lm	23W	99W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E27

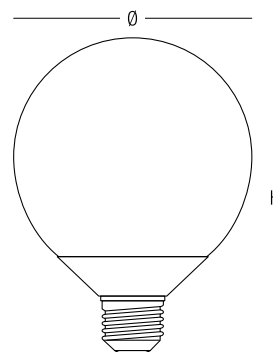

EG-20W T3	
E27	Ø105 x 140H mm
EG-23W T3	
E27	Ø120 x 157H mm

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm





Energy Saving Lamps Reflector series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance
- Reliable starting at -20°C
- High energy efficiency

Product features


- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2.5mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Beam Angle	Dimmable	Base
EF-5W	A	T2	160 lm	5W	35W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	90°	No	E14 / E27
EF-7W	A	T2	140 lm	7W	32W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	90°	No	E14 / E27
EF-9W	A	T2	250 lm	9W	47W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	100°	No	E14 / E27
EF-11W	A	T3	430 lm	11W	80W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	110°	No	E27



Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm

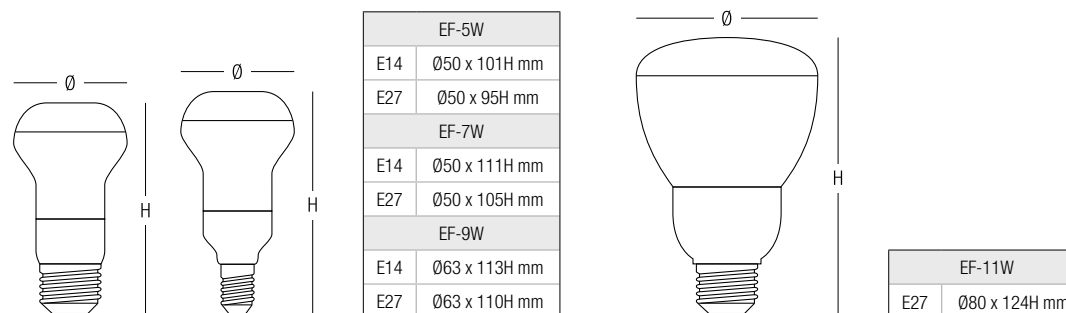



Energy Saving Lamps Reflector series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages


- Long lifespan
- High luminous efficacy
- High lumen maintenance
- Reliable starting at -20°C
- High energy efficiency

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly



Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Beam Angle	Dimmable	Base
EF-7W/I	A	T2	180 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	110°	No	GU10
EF-9W/I	A	T2	220 lm	9W	35W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	110°	No	GU10

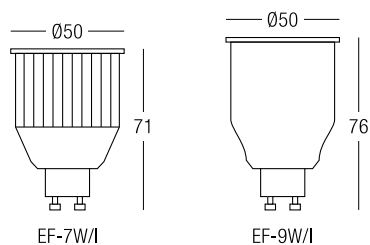

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm



Energy Saving Lamps Capsule & Cabinet series

Also known as Compact Fluorescent Lamps (CFL), comply with European ecodesign requirements, provide a high performance and reliable source of low energy lighting.

Technical Advantages

- Long lifespan
- High luminous efficacy
- High lumen maintenance
- Reliable starting at -20°C
- High energy efficiency

Product features

- Various colour temperatures available
- Flicker free rapid start up
- Low mercury content (<2mg per lamp)
- Environmental friendly




EC-5W / EC7W




EBR-7W / EBR-9W

Model No.	Energy Class	Tube	Lumen	Wattage	Incandescent Equivalent	Colour Temperature	Lifetime	CRI	Voltage	Dimmable	Base
EC-5W	A	T2	190 lm	5W	21W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EC-7W	A	T2	300 lm	7W	30W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	E14 / E27
EBR-7W	A	T2	260 lm	7W	27W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	GX53
EBR-9W	A	T2	320 lm	9W	31W	2700 / 4200 / 6500 K	10000 hrs	≥80	220~240V	No	GX53



EC-5W / EC-7W (E27/E14)

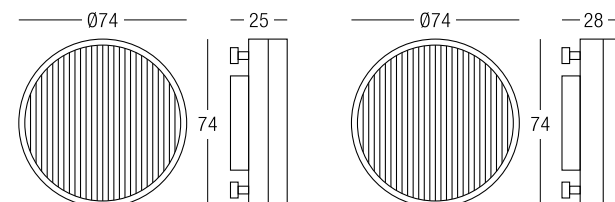

EBR-7W

EBR-9W



Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



Address : 1/F Green 18, No.18 Science Park
East Avenue, Shatin, Hong Kong

Tel : (852) 23452772 Web : www.stll.com
Fax : (852) 23574860 Email : info@stll.com

