

Incandescent Bulbs

Luxtek®





Incandescent Standard & Globe series


Technical Advantages

- Long lifespan
- High colour rendering (Ra=100)
- Mercury free



Model No.	Energy Class	Lumen	Wattage	Lifetime	Voltage	Dimmable	Base
STS45	E	210 lm	25W	1000 hrs	220~240V	Yes	E14 B15 E27 B22
		400 lm	40W				
		653 lm	60W				

Model No.	Energy Class	Lumen	Wattage	Lifetime	Voltage	Dimmable	Base
STA55	E	210 lm	25W	1000 hrs	220~240V	Yes	E27 B22
		400 lm	40W				
		653 lm	60W				
		860 lm	75W				
		1225 lm	100W				

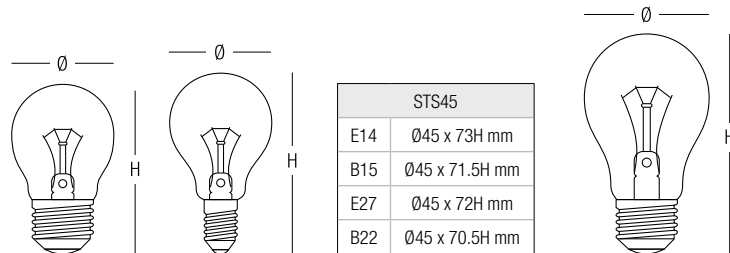

STS45	
E14	Ø45 x 73H mm
B15	Ø45 x 71.5H mm
E27	Ø45 x 72H mm
B22	Ø45 x 70.5H mm

STA55	
E27	Ø55 x 95H mm
B22	Ø55 x 93.5H mm



Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm

Luxtek®





Incandescent Candle series


Technical Advantages

- Long lifespan
- High colour rendering (Ra=100)
- Mercury free




Model No.	Energy Class	Lumen	Wattage	Lifetime	Voltage	Dimmable	Base
STC35	E	210 lm	25W	1000 hrs	220~240V	Yes	E14 B15 E27 B22
		400 lm	40W				
		653 lm	60W				


Model No.	Energy Class	Lumen	Wattage	Lifetime	Voltage	Dimmable	Base
STCL35	E	210 lm	25W	1000 hrs	220~240V	Yes	E14 B15
		400 lm	40W				
		653 lm	60W				
STCT35	E	210 lm	25W	1000 hrs	220~240V	Yes	E14 B15
		400 lm	40W				
		653 lm	60W				



STC35	
E27	Ø35 x 92H mm
B22	Ø35 x 90.5H mm
E14	Ø35 x 98H mm
B15	Ø35 x 96H mm



STCL35	
E14	Ø35 x 125H mm
B15b	Ø35 x 123H mm



STCT35	
E14	Ø35 x 98H mm
B15b	Ø35 x 96H mm



Tolerance of product dimension Length ± 2mm / Diameter ± 0.5mm

Luxtek®






Incandescent Reflector series

Technical Advantages


- Long lifespan
- High colour rendering (Ra=100)
- Mercury free



Model No.	Energy Class	Lumen	Intensity	Wattage	Lifetime	Voltage	Beam Angle	Dimmable	Base
STR50	E	107 lm	120 cd	25W	1000 hrs	220~240V	38°	Yes	E14
		208 lm	350 cd	40W					
STR63	E	208 lm	350 cd	40W	1000 hrs	220~240V	60°	Yes	E27 / B22
		360 lm	650 cd	60W					
STR80	E	360 lm	650 cd	60W	1000 hrs	220~240V	38°	Yes	E27 / B22
		695 lm	1000 cd	100W					



STR50	
E14	Ø50 x 85H mm



STR63	
E27	Ø63 x 102H mm
B22	Ø63 x 101H mm

STR80	
E27	Ø80 x 114H mm
B22	Ø80 x 112.5H mm

CE RoHS REACH ErP

Tolerance of product dimension Length ± 2 mm / Diameter ± 0.5 mm



Address : 1/F Green 18, No.18 Science Park
East Avenue, Shatin, Hong Kong

Tel : (852) 23452772 Web : www.stll.com
Fax : (852) 23574860 Email : info@stll.com

